

特性 FEATURES :

- * 5 x 20mm ガラス管・速断タイプ
Glass Tube, Fast-Acting Type (Normal Blow)
- * RoHS 適合品 RoHS-Compliant Products

規格承認 APPROVALS :


- * UL 承認 UL Listed [100mA-2.5A 125V/250V] [3-8A 125V]
- * UL 構成部品プログラム承認 UL Recognized [3-8A 250V]
- * CSA 承認 [32mA-8A 125V/250V]
- * METI (PSE) 承認 [1A-15A 125V/250V]
- * KC (Korean Certification) 承認 [100mA-7A 250V]



51NM/52NM SERIES


寸法 DIMENSIONS :

51NM



52NM

51NM(P)

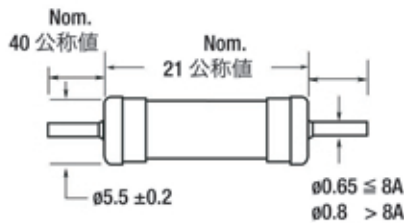


単位 Unit : mm

電気的特性 ELECTRICAL CHARACTERISTICS :

電流値 % of Ampere Rating	溶断時間 Opening Time
100%	4 時間最小 hours Min.
135%	1 時間最大 hour Max.
200%	5 秒最大 sec Max.

溶断曲線 AVERAGE TIME CURRENT CURVES :

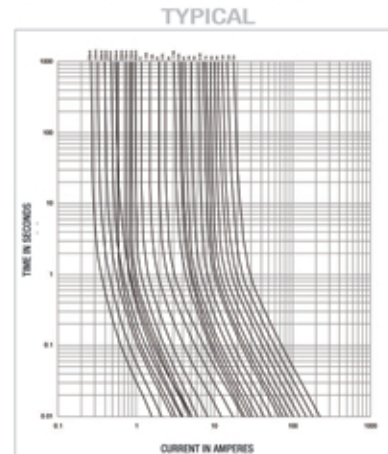

仕様 SPECIFICATIONS :

品名 Product Code	電流値 Ampere Rating	電圧値 (VAC) Voltage Rating H / L	Pt 値 10I _n Typical Pre-Arcing Pt at 10I _n (A ² sec)	品名 Product Code	電流値 Ampere Rating	電圧値 (VAC) Voltage Rating H / L	Pt 値 10I _n Typical Melting Pt at 10I _n (A ² sec)
51NM / 52NM 0200H/L	200 mA	250V / 125V	0.019	51NM / 52NM 016H/L	1.6 A	250V / 125V	2.82
51NM / 52NM 0250H/L	250 mA	250V / 125V	0.020	51NM / 52NM 020H/L	2 A	250V / 125V	5.16
51NM / 52NM 0300H/L	300 mA	250V / 125V	0.024	51NM / 52NM 025H/L	2.5 A	250V / 125V	5.82
51NM / 52NM 0315H/L	315 mA	250V / 125V	0.026	51NM / 52NM 030H/L	3 A	250V / 125V	9.49
51NM / 52NM 0350H/L	350 mA	250V / 125V	0.033	51NM / 52NM 032H/L	3.15 A	250V / 125V	10.10
51NM / 52NM 0400H/L	400 mA	250V / 125V	0.042	51NM / 52NM 035H/L	3.5 A	250V / 125V	12.19
51NM / 52NM 0500H/L	500 mA	250V / 125V	0.084	51NM / 52NM 040H/L	4 A	250V / 125V	15.98
51NM / 52NM 0600H/L	600 mA	250V / 125V	0.164	51NM / 52NM 050H/L	5 A	250V / 125V	30.15
51NM / 52NM 0630H/L	630 mA	250V / 125V	0.179	51NM / 52NM 060H/L	6 A	250V / 125V	48.55
51NM / 52NM 0700H/L	700 mA	250V / 125V	TBA	51NM / 52NM 063H/L	6.3 A	250V / 125V	60.47
51NM / 52NM 0750H/L	750 mA	250V / 125V	0.304	51NM / 52NM 070H/L	7 A	250V / 125V	74.25
51NM / 52NM 0800H/L	800 mA	250V / 125V	0.355	51NM / 52NM 080H/L	8 A	250V / 125V	103.2
51NM / 52NM 010H/L	1 A	250V / 125V	0.720	51NM / 52NM 090H/L	9 A	250V / 125V	136.8
51NM / 52NM 012H/L	1.2 A	250V / 125V	1.40	51NM / 52NM 100H/L	10 A	250V / 125V	175.6
51NM / 52NM 013H/L	1.25 A	250V / 125V	1.54	51NM / 52NM 120H/L	12 A	250V / 125V	256.3
51NM / 52NM 015H/L	1.5 A	250V / 125V	2.15	51NM / 52NM 150H/L	15 A	250V / 125V	398.2

* 定格電圧 Voltage Rating : H - 250VAC / L - 125VAC

* 遮断定格 Interrupting Rating : 10,000A 125VAC (32mA-8A)
(UL/CSA) 35A 250VAC (32mA-1A)
100A 250VAC (1.2A-3.5A)
200A 250VAC (4A-8A)

* 遮断定格 Interrupting Rating : 100A 125VAC (51NM: 1-15A)
(電安 PSE) 500A 125VAC (52NM/51NM(P): 1-15A)
100A 250VAC (51NM/52NM/51NM(P): 1A-15A)
(韓国 KC) 100A 250VAC (100mA-7A)